

Screw Compressors below 30kW

People. Passion. Performance.

People. Passion. Performance.



For Chicago Pneumatic, it isn't just about products. We value our end-users' and distributors' **performance**, and do our ultimate best to make it **easy to work** with us while providing **reliable products with a passion**.

- Broad product portfolio of robust compressors & tools
- Decades of experience & innovation
- 100% committed distributor partnership

This is how we keep you productive at all times, meeting the needs of professionals in vehicle service, general industry and construction around the globe.

People. Passion. Performance.

Define your needs, our broad offer does the rest

Going for our extensive offer of oil-injected screw compressors below 30kW, you choose for **reliable performance**, **thrustworthy technology** and **increased efficiency**. These ranges are also suitable for more demanding applications and can be deployed in harsch working conditions.





| Noise level | 72-80 dB(A) |
|-------------|---------------------|
| Vessel size | 200, 270 or 500 L |
| FAD | 220 - 1631 l/min |
| Power | 3-20 hp / 2,2-15 kW |
| Pressure | 8 - 13bar |
| | |

115 - 354 kg

| Noise level | Silent: 61-69 dB(A) |
|-------------|---------------------|
| Vessel size | 0, 200, 270, 500 L |
| FAD | 240 - 1750 l/min |
| Power | 3-20 hp / 2,2-15 kW |
| Pressure | 8 - 13 bar |
| Weight | 99 - 348 kg |

User benefits

- Simple installation & easy maintenance
- Instinctive and easy to use
- Stable operations (constant pressure)
- Trustworthy technology and new inhouse designed air ends
- Up to 30% more energy efficient than an equivalent power sized Piston compressor

User benefits

- Easy and user-friendly operation
- Durable performance and designed to operate in hard working conditions
- Low maintenance costs, no wearing parts
- Complete and compact solution
- Quiet operation allowing installation close to the workplace

On top of that, these units are **compact, easy to service** and **quiet**, and thus suitable to install in or close to the workshop (f.e. service garage or small assembly line).





| | _ |
|-------------|------------------------|
| Noise level | Silent: 66-77 dB(A) |
| Vessel size | 0, 270 or 500 L |
| FAD | 蓂 520 - 3893 l/min |
| Power | 7,5-40 hp 5,5-30 kW |
| Pressure | 8 - 13 bar |
| Weight | 251 - 654 kg |

CPVR - CPVS



User benefits

- In-house designed air end suitable for continuous duty and very hard working conditions.
- Long lasting belts and reliable belt tensioning system for excellent performance
- Good positioning of service items for easy servicing
- Save space and installation costs with tank-mounted installations with dryer
- Increased operating comfort through reduced noise levels

User benefits

- Inverter technology perfectly matching the air flow with the air demand saving energy costs up to 30%
- Highly efficient element ensures low energy consumption and long term performance
- Highly efficient belt transmission reducing energy consumption
- Protects your air network from rust and corrosion due to integrated solutions (dryer, air filter,...)
- User-friendly controller for full control



CPN Series 3 - 20hp / 2,2 - 15kW



The energy efficiency comes with the technology

The CPN screw compressors are up to 30% more energy efficient than an equivalent power sized piston compressor. The CPN is also designed to work continuously if needed, this allows you to get 100% performance, 24 hours a day, from your equipment without fearing a single fail.





- Time to convert to screw technology!
- Up to 30% more energy efficient than an equivalent power sized piston compressor
- Designed to work continuously
- 24/7 performance without any risk of failure
- Pressure stability and no pulsation compared to piston compressors.



The compressor, equipped with simple automatic controls, is ready for immediate installation and fitted with an air receiver.



Almost no panels to be removed in case of maintenance and strategic placement of components to facilitate maintenance.



Due to rotary technology, the CPN consumes up to 30% less power compared to a traditional piston compressor.



Constant pressure

The combined and continous action of the spinning element generates air flow delivery without pulsations, granting you the stability you



New generation air ends

New generation air ends guarantee superior efficiency, durability and reliability

| Technical Table | ≣ [l/min] | | | F | | II () | Ы | | | |
|-----------------------------|--------------------|-------------------|-------------------|----------|------|-------------------|-------------------|--|--|--|
| Туре | 8 bar version | 10 bar version | 13 bar version | HP | kW | dB(A) | L x W x H (mm) | | | |
| 200L Tank Mounted (+ Dryer) | | | | | | | | | | |
| CPN 3 | 297 | 220 | na | 3 | 2,2 | 72 | 1440 x 680 x 1250 | | | |
| CPN 4 | 350 | 280 | na | 4 | 3 | 73 | 1440 x 680 x 1250 | | | |
| CPN 5,5 | 495 | 415 | na | 5,5 | 4 | 74 | 1440 x 680 x 1250 | | | |
| CPN 7,5 | CPN 7,5 641 557 na | | 7,5 | 5,5 | 76 | 1440 x 680 x 1250 | | | | |
| CPN 10 | 948 | 802 | na | 10 | 7,5 | 75 | 1440 x 680 x 1250 | | | |
| 270L Tank Mounted (+ Dryer) | | | | | | | | | | |
| CPN 3 | 297 | 220 | na | 3 | 2,2 | 72 | 1550 x 680 x 1280 | | | |
| CPN 4 | 350 | 280 | na | 4 | 3 | 73 | 1550 x 680 x 1280 | | | |
| CPN 5,5 | 495 | 415 | na | 5,5 | 4 | 74 | 1550 x 680 x 1280 | | | |
| CPN 7,5 | 641 | 557 | na | 7,5 | 5,5 | 76 | 1550 x 680 x 1280 | | | |
| CPN 10 | 948 | 802 | na | 10 | 7,5 | 75 | 1550 x 680 x 1280 | | | |
| CPN 15 | 1408 | 1265 | na | 15 | 11 | 76 | 1550 x 718 x 1322 | | | |
| CPN 20 | 1631 | 1473 | na | 20 | 15 | 78 | 1550 x 718 x 1322 | | | |
| 500L Tank Mounted (+ Dryer) | | | | | | | | | | |
| CPN 15 | 1408 | 1265 | 1034 | 15 | 11,0 | 76 | 1935 x 718 x 1453 | | | |
| CPN 20 | 1631 | 1473 | 1224 | 20 | 15 | 78 | 1935 x 718 x 1453 | | | |

^{*} For weights and part numbers, please contact your local customer center



CPM Series 3 - 20HP / 2,2 - 15kW



Quiet by design, complete and compact

Engineered for high performance, efficiency and reliability, the CPM air compressor series can meet the compressed air demands of a tire shop, maintenance shop, vehicle body shop, paint shop or automotive dealership. Quiet by design, the CPM can be installed almost anywhere, without disturbing your working environment. Base mounted or receiver mounted, with or without dryer, the CPM is the leading rotary screw compressor for service or light industrial applications.





Innovative design concept

- Compact and all in one system with a limited footprint
- Save space and installation costs with tank-mounted installations with dryer
- A complete installation reducing the risk of air leakages

CPM 15 270L D



Easy operation

Compressed air plain and simple. Just connect the cables, pipes and press start.



Efficient cooling

Lower internal temperatures make your compressor more reliable and extend lifetime.



Built to last

Designed for continuous duty and very hard working conditions.



Fast & cost effective maintenance

No wearing parts: increases reliability and reduces maintenance costs.



User friendly control

ES99 controller makes it simple with easy warning and maintenance messages. (only for 7,5 - 20 HP models)

| Technical Table | ≡ [l/min] | | | r io | | • | Ю | | | |
|-----------------------------|-----------------------------|-------------------|-------------------|-----------------|-----|----------|-------------------|--|--|--|
| Туре | 8 bar version | 10 bar version | 13 bar version | НР | kW | dB(A) | L x W x H (mm) | | | |
| Base mounted | | | | | | | | | | |
| CPM 3 | 297 | 240 | na | 3 | 2,2 | 61 | 620 x 612 x 995 | | | |
| CPM 4 | 443 | 320 | na | 4 | 3 | 61 | 620 x 612 x 995 | | | |
| CPM 5,5 | 560 | 470 | na | 5,5 | 4 | 62 | 620 x 612 x 995 | | | |
| CPM 7,5 | 697 | 600 | na | 7,5 | 5,5 | 64 | 620 x 612 x 995 | | | |
| CPM 10 M | 1008 | 920 | na | 10 | 7,5 | 64 | 650 x 642 x 995 | | | |
| CPM 10 | 1008 | 920 | 557 | 10 | 7,5 | 66 | 810 x 650 x 995 | | | |
| CPM 15 | 1428 | 1310 | 887 | 15 | 11 | 68 | 810 x 650 x 995 | | | |
| CPM 20 | 1750 | 1650 | 1190 | 20 | 15 | 69 | 810 x 650 x 995 | | | |
| | 200L Tank Mounted (+ Dryer) | | | | | | | | | |
| CPM 3 | 297 | 240 | na | 3 | 2,2 | 61 | 1429 x 612 x 1300 | | | |
| CPM 4 | 443 | 320 | na | 4 | 3 | 61 | 1429 x 612 x 1300 | | | |
| CPM 5,5 | 560 | 470 | na | 5,5 | 4 | 62 | 1429 x 612 x 1300 | | | |
| CPM 7,5 | 697 | 600 | na | 7,5 | 5,5 | 64 | 1429 x 612 x 1300 | | | |
| CPM 10 M | 1008 | 920 | na | 10 | 7,5 | 66 | 1429 x 642 x 1300 | | | |
| 500L Tank Mounted (+ Dryer) | | | | | | | | | | |
| CPM 10 | 1008 | 920 | 557 | 10 | 7,5 | 66 | 1935 x 650 x 1483 | | | |
| CPM 15 | 1428 | 1310 | 887 | 15 | 11 | 68 | 1935 x 650 x 1483 | | | |
| CPM 20 | 1750 | 1650 | 1190 | 20 | 15 | 69 | 1935 x 650 x 1483 | | | |

 $^{^{\}star}$ For weights and part numbers, please contact your local customer center



^{*} All units are available also installed on 270 lt air vessel









The ultimate all-in-one solution

Chicago Pneumatic introduced the CPA-CPB Series more than a decade ago. And in this period of time a strong reputation of quality and top performance was built. But, apart from this remarkable past, the design and philosophy have evolved to match new customer needs: a beautiful allin-one, powerful and silent screw compressor. That's what the CPA-CPB Series is!

A seamless product in terms of user-friendliness, reliability and life duration, which makes this series, "the screw compressor" for tough and hard working conditions.



CPA 10 - 270L





Innovative design concept

The CPA-CPB Series can be configured as an ultimate all-in-one solution that includes:

- Air receiver 270 or 500L
- Refrigerant dryer
- Automatic drain
- Line filter

Forget about complex and costly installations. Simply connect the power, connect the piping and press START!



Low noise levels

Insulation foam. deflectors and antivibration pads assure low noise levels.



Easy and fast

Enabled by good positioning of service items: belts, oil and



A unique control unit, specially programmed for energy saving.



Built to last

Designed for continuous duty and very hard working conditions.



Small footprint

Compresses, stores and processes air using just 1,5 m².

| Technical Table | cal Table ݓ [I/min] | | | i i | | ••• | Ю |
|-----------------|---------------------|-------------------|---------------------|------------|---------|-------------|---------------------------------------|
| Туре | 8 bar version | 10 bar version | 13 bar version | HP | kW | dB(A) | L x W x H (mm) |
| | | | CPA Base | mounte | d | | (+ Dryer) |
| CPA 7 | 820 | 670 | 520 | 7,5 | 5,5 | 66 | 1095 x 642 x 1220 (1095 x 642 x 1220) |
| CPA 10 | 1153 | 1000 | 810 | 10 | 7,5 | 66 | 1095 x 642 x 1220 (1095 x 642 x 1220) |
| CPA 15 | 1665 | 1435 | 1210 | 15 | 11 | 69 | 1095 x 642 x 1220 (1095 x 642 x 1220) |
| CPA 20 | 1985 | 1771 | 1480 | 20 | 15 | 69 | 1095 x 642 x 1220 (1095 x 642 x 1220) |
| | | * All units a | re available instal | led on 270 | and 500 | It air vess | el |
| CPB Base | | | | | d | | (+ Dryer) |
| CPB 15 | 1726 | 1492 | 1121 | 15 | 11 | 70 | 1095 x 642 x 1220 (1095 x 642 x 1220) |
| CPB 20 | 2218 | 2020 | 1538 | 20 | 15 | 70 | 1095 x 642 x 1220 (1095 x 642 x 1220) |
| CPB 25 | 2771 | 2501 | 1959 | 25 | 18,5 | 72 | 1204 x 805 x 1220 (1659 x 805 x 1220) |
| CPB 30 | 3511 | 3011 | 2612 | 30 | 22 | 74 | 1205 x 805 x 1220 (1659 x 805 x 1220) |
| CPB 40 | 3893 | 3502 | 2942 | 40 | 30 | 77 | 1206 x 805 x 1220 (1659 x 805 x 1220) |

* All units are available installed on 500 lt air vessel



^{*} For weights and part numbers please contact your local customer center

CPVR / CPVS Series 10 - 40 HP / 7,5 - 30 kW




Compressed air that pays for itself

The Chicago Pneumatic Variable Speed compressor series CPVR-CPVS allows you to drastically reduce your operating costs when your equipment is not working at full capacity all day long. Basically the inverter reduces the motor speed to match your air consumption and as a result, you save energy and money.

The CPVS is great as a stand-alone machine or networked to a load-unload CP compressor where it can function as a master and regulate the air delivery for the whole site.



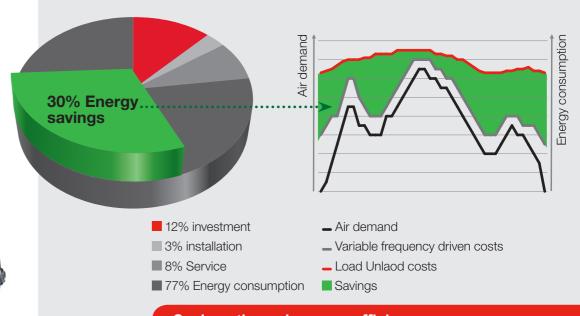

Savings through energy efficiency

Energy costs represent about 70% of the total operating cost of your compressor over a 5 year period. That's why reducing the operating cost of a compressed air solution should be a major focus. Variable frequency driven compressors can cut the energy bill of your compressor by up to 30%.



Low noise levels

Insulation foam, deflectors and antivibration pads assure low noise levels.



Easy and fast maintenance

Enabled by good positioning of service items: belts, oil and filters.



ES ES

A unique control unit, specially programmed for energy saving.



Built to last

Designed for continuous duty and very hard working conditions.



Small footprint

Compresses, stores and processes air using just 1,5 m².

| Technical Table | ‡ | | Hip . | | 0 | • | Ю | |
|--|--------------------------|---------------|--------------|--------------|------------|---------------------------------------|---------------------------------------|--|
| Туре | Type I/min min I/min max | | HP | kW | Bar | dB(A) | L x W x H (mm) | |
| | | | | CPVR | | | (+ Dryer) | |
| CPVR 10/6-13 | 273 | 1083 | 10 | 7,5 | 6-12,5 | 73 | 1095 x 642 x 1220 (1095 x 642 x 1220) | |
| CPVR 15/6-13 | 443 | 1559 | 15 | 11,0 | 6-12,5 | 73 | 1095 x 642 x 1220 (1095 x 642 x 1220) | |
| | | * All units a | re available | installed or | 270 and 50 | 00 It air vess | sel | |
| CF | | | | | | | (+ Dryer) | |
| CPVS 20/8 | 660 | 2250 | 20 | 15 | 5,5 - 9,5 | 69 | 1204 x 805 x 1220 (1659 x 805 x 1220) | |
| CPVS 20/10 | 470 | 2210 | 20 | 15 | 7,5-12,5 | 69 | 1205 x 805 x 1220 (1659 x 805 x 1220) | |
| CPVS 25/8 | 880 | 3170 | 25 | 18,5 | 5,5 - 9,5 | 72 | 1206 x 805 x 1220 (1659 x 805 x 1220) | |
| CPVS 25/10 | 670 | 2730 | 25 | 18,5 | 7,5-12,5 | 72 | 1207 x 805 x 1220 (1659 x 805 x 1220) | |
| CPVS 30/8 1020 3620 | | 30 | 22 | 5,5 - 9,5 | 74 | 1208 x 805 x 1220 (1659 x 805 x 1220) | | |
| CPVS 30/10 | 850 | 3240 | 30 | 22 | 7,5-12,5 | 74 | 1209 x 805 x 1220 (1659 x 805 x 1220) | |
| CPVS 40/8 | 1240 | 4170 | 40 | 30 | 5,5 - 9,5 | 77 | 1210 x 805 x 1220 (1659 x 805 x 1220) | |
| CPVS 40/10 | 980 | 3640 | 40 | 30 | 7,5-12,5 | 77 | 1211 x 805 x 1220 (1659 x 805 x 1220) | |
| * All units are available installed on 500 lt air vessel | | | | | | | | |

^{*} For weights and part numbers please contact your local customer center



Chicago Pneumatic: full offer, global presence







Construction tools



Portable compressors and generators



Paving equipment



Industrial compressors



DISTRIBUTED BY

The 'original part' identification confirms that these components passed our strict test criteria. All parts are designed to match the compressor and are approved for use on the specified compressor. They have been thoroughly tested to obtain the highest level of protection, extending the compressors' lifetime and keeping the cost of ownership to an absolute minimum. No compromises are made on reliability. The use of 'original part' certified quality components helps ensure reliable operation and will not impact the validity of your warranty, unlike other parts. Look for your quality assurance.

www.cp.com